

PRINT WIDTH (58mm paper width)	52.5±0.5mm
FONTS	12x24 (Font A), 9x17 (Font B)
COLUMN CAPACITY (80MM PAPER WIDTH)	48 (Font A), 64 (Font B)
COLUMN CAPACITY (58MM PAPER WIDTH)	35 (Font A), 46 (Font B)
CHARACTER SIZE (mm)	1.25x3 mm (Font A), 0.88x2.13 mm (Font B)
CHARACTER SET	Alphanumeric 95, International character 18 set, Graphics
CHARACTERS	128x43 page including user-defined page ANK, Simplified Chinese
BARCODE	UPC-A, UPC-E, JAN8/EAN 8, JAN13/EAN13, Code39, Code93, Code128, ITF, CODABAR(NW-7), GS1-128, GS1 DataBar Omnidirectional, GS1 DataBar Truncated, GS1 DataBar Limited, GS1 DataBar Expanded
2-DIMENSIONAL SYMBOLS	PDF417, QR code, Maxi Code, Datamatrix, Aztec, Two-dimensional GS1 DataBar, Composite Symbology
PAPER SIZE (80mm paper width)	79.5 ± 0.5mm
PAPER SIZE (58mm paper width)	57.5 ± 0.5mm
DIAMETER	83[mm]
PAPER THICKNESS	48-80 μm
AUTO CUTTER	Partial cut (cutting with one point in left edge left uncut)
SENSORS	Roll paper end / Roll paper near-end / Cover open
MCBF	60 million lines
MTBF	360,000 hours
AUTO CUTTER LIFE	1.5 million cuts
HEAD LIFE	150km, 15 million lines
INTERFACES	USB 2.0(capped)+Ethernet;
D.K.D. FUNCTIONS	2 drivers
AC ADAPTER	AC adapter C1
POWER SOURCE	DC 24V±5%
POWER CONSUMPTION	Approx 0.80W (Stand-by) Approx 29.5W (Operating)
TEMPERATURE	Operation 5-45°C / Storage -10-50°C
HUMIDITY	Operation 10-90% / Storage 10-90%
NOISE LEVEL	Approx. 55 dB (bystander position)
OVERALL DIMENSIONS	140mm (W) x 199mm (D) x 146mm (H)

WEIGHT	1.7Kg
COLOUR	EBCK
INSTALLATION	Horizontally / Vertically / Wall-mounted
BUZZER	Unsupported
OPERATING SYSTEMS	Windows, MacOSX, iOS, Android, Linux
DATA BUFFER	Selectable as 45 bytes or 4 KB
WHAT'S IN THE BOX	Roll paper, User's manual, AC adapter, AC cable, USB cable, Wall hanging bracket, Screws for wall hanging bracket, 58mm-width paper guide plate, Power switch cover, Power switch waterproof cover, Rubber feet for vertical installation

Quality Medium Umbrella SPIM Sponsor

[Read More](#)

SKU: GDT-UMBRELA-M

Price: 2,250 Vt

Stock: instock

Categories: [Tools](#)



Product Description

Quality Large Umbrella SPIM sponsor



[Read More](#)

SKU: GDT-UMBRELA-L

Price: 3,450 Vt

Stock: instock

Categories: [Tools](#)

Product Description



TELSTRA CR2000 MKII CORDLESS PHONE

[Read More](#)

SKU: PHO-CR2000

Price: 4,990 Vt

Stock: instock

Categories: [Telephone / PABX](#)

Product Description

Documentation: [cr2000mkii.pdf](#)



SAMSUNG 27in, 16:9 CURVE LED,1920x1080, 4MS, D-SUB, HDMI, BEZELESS

[Read More](#)

SKU: SCR-LC27R500FHEXXY

Price: 29,990 Vt

Stock: instock

Categories: [LCD / Screens](#)

Product Description

Dimensions

DimensionsWith Stand: 614.2 x 466.2 x 251.2mm | Without Stand: 614.2 x 362.8 x 94.4mm

VESA Wall Mount Pattern75 x 75mm

WeightWith Stand: 4.3kg | Without Stand: 3.5kg

Display

Colour Support: 16.7M

Curvature: 1800R

Dynamic Contrast Ratio: Mega

Native Aspect Ratio: 16:9

Refresh Rate: 60Hz

Resolution: 1920 x 1080p Full HD

Response TimeL 4(GTG)ms

Screen Size: 27"

Static Contrast Ratio: 3000:1

Type3 Sided Bezel Less Curved Display

Viewing Angle: Horizontal: 178degree / Vertical: 178degree

Functions And Features

FeaturesGame Mode, FreeSync

General

Pan & Tilt Rotation-2.0degree~22.0degree°

Inputs

HDMI x1

VGA (D-sub)x1

Inputs/ Outputs

Headphone Jack:Yes

Power

Power Consumption: 35W (Max), Less than 0.3W (DPMS)

Power Supply: AC 100~240V

APC BACK-UPS (BX) 950VA, 230V,AVR

[Read More](#)

SKU: UPS-BX950MI-AZ

Price: 18,990 Vt

Stock: instock

Categories: [UPS / PSU](#)



Product Description

Output

Max Configurable Power (Watts): 480 Watts / 950VA

Output Frequency (sync to mains): 50/60 Hz +/- 1 Hz Sync to mains

Topology: Line interactive

Waveform type: Stepped approximation to a sinewave

Transfer Time: 6 ms typical : 10 ms maximum

Input

Input frequency: 50/60 Hz +/- 5 Hz Auto-sensing

Input voltage range for main operations: 140 - 300V

Number of Power Cords: 1

Input Power Factor at Full Load: 0.54

Batteries & Runtime

Battery type: Lead-acid battery

Typical recharge time: 8 hour(s)

Replacement Battery: [RBC17](#)

Expected Battery Life (years): 3 - 5

Battery Volt-Amp-Hour Capacity: 108

Runtime: [View Runtime Chart](#)

Communications & Management

Control panel: LED Status display with on line : on battery

Audible Alarm: Alarm when on battery : distinctive low battery alarm

Surge Protection and Filtering

Surge energy rating: 273 Joules

Data Line Protection: RJ45 10/100/1000 Base-T Ethernet protection

Physical

Maximum Height: 160MM, 16.0CM

Maximum Width: 120MM, 12.0CM

Maximum Depth: 355MM, 35.5CM

Net Weight: 6.1KG

Shipping weight: 6.6KG

Shipping Height: 250MM, 25.0CM

Shipping Width: 197MM, 19.7CM

Shipping Depth: 430MM, 43.0CM

Color: Black

SCC Codes: 10731304410758

ASUS Wireless USB Adapter 1167MBps



[Read More](#)

SKU: NET-USB-AC53NANO

Price: 5,490 Vt

Stock: instock

Categories: [Computer Accessories](#), [Network Wireless / Bluetooth](#)

Product Description

Key Features

- **World's smallest USB MU-MIMO Wi-Fi adapter**

Super-fast Wi-Fi in a nano-sized package that's small enough to leave plugged in!

- **Instant Wi-Fi upgrade for laptops**

Enjoy 802.11ac Wi-Fi speeds.

- **Perfect for streaming and gaming**

Dual-band support gives you the 5GHz frequency band for smooth 4K UHD streaming and low latency gaming. **Extreme 5th-generation Wi-Fi speed** Super-fast Wi-Fi ever becomes more accessible via USB, going up to 867Mbps on the clear 5GHz band. Using 802.11ac wireless, faster connectivity and enjoyment come to all your devices. **Multi-user MIMO support** MU-MIMO technology boosts connection speed when multiple compatible clients are online. **Travel-friendly design** The USB-AC53 Nano is specially-designed to be compact and durable to safely and securely stay plugged into a notebook PC even inside a slim carrying case. **Selectable dual-band 300Mbps/ 867Mbps bandwidth** Dual-band operation suits mainstream and power users. The 2.4 GHz band is perfect for web browsing, email, and social networking, while the 5 GHz frequency enables smooth 4K streaming and online gaming for blazingly fast and lag-free home entertainment.

Specification:

Network Standard	IEEE 802.11 ac
Product Segment	AC1200 enhanced AC performance : 300+867 Mbps
Interface	USB 2.0
Data Rate	802.11a : 6,9,12,18,24,36,48,54 Mbps 802.11b : 1, 2, 5.5, 11 Mbps 802.11g : 6,9,12,18,24,36,48,54 Mbps 802.11n : up to 300 Mbps 802.11ac : up to 867 Mbps
Antenna	2 x PIFA Internal 1.81 dBi antenna x 2
Transmit/Receive	MIMO technology
Operating Frequency	2.4 GHz / 5 GHz
Security	64-bit WEP, 128-bit WEP, WPA2-PSK, WPA-PSK
Certificates	CE, FCC, IC, NCC
Dimensions	20 x 14 x 7 ~ mm (WxDxH) (Without Bezel)
Weight	5 g (Device Only)
OS Support	Windows® 10 Windows® 8.1 Windows® 8 Windows® 7 Mac OS X 10.7 to 10.12
Package Content	Support CD Warranty card
Note	*The network speeds and bandwidth based on current IEEE 802.11ac specifications. Actual performance may be affected by network and service provider factors, interface type, and other conditions. Connected devices must be 802.11ac-compatible for best results. Out Put power as below: 2412-2472MHz (802.11n HT40 MCS0): 17.24 dBm 5180-5240MHz (802.11n HT20 MCS0): 17.38 dBm 5260-5320MHz (802.11ac VHT80 MCS0): 15.8 dBm 5500-5700MHz (802.11n HT20 MCS0): 13.31 dBm



EXTRALINK OUTDOOR FTTX CLOSURE 4 TRAYS 96 CORE BRUCE

[Read More](#)

SKU: NET-EL-FTTX-BRUCE-96

Price: 5,990 Vt

Stock: instock

Categories: [Cables and Cable accessories](#), [Fiber Equipment](#)

Product Description

The closures are made of tough anti-corrosive polycarbonate that makes the closures ideal for aerial, cable duct, direct burial and well applications. The BRUCE closure can accommodate up to 4x 24-fiber splice trays. The closures employ gasket-sealing technology that enables easy of installation and re-entry requiring no special tools.

- Reliable gasket sealing
- Easy installation with no special tool required
- Re-enterable with no re-entry kit needed
- High compressive strength

Applications:

- Suitable for Ribbon and non-ribbon fibers
- Aerial
- Cable duct
- Direct burial
- Well

Specification:

No. of Cable Port: 2 Max. Cable Diameter allowed: 14mm/12mm Dimensions: 270x200x85mm
Weight : 1.2~1.5kg Operating temperature: -40~+60°C Fiber Bend Radius: 30mm Max. No. of
Splice Trays: 4 Max. Capacity (single fiber splice): 96



EXTRALINK Power Supply with Battery Charger 12V/13.8V 155W

[Read More](#)

SKU: PWR-EL-AD-155A

Price: 7,990 Vt

Stock: instock

Categories: [UPS / PSU](#)

Product Description

Extralink buffer power supply - ensures continuous operation

The buffer power supply unit is an electrical device that converts 230 V mains voltage to DC voltage. Its specificity lies in the fact that we can connect an external battery to it, from which energy will be drawn in case of a 230 V power outage, so as to ensure the continuity of the receiving device.

More efficient cooling of the device

The perforated metal casing facilitates airflow, which results in more efficient cooling of the unit. The screw terminals are marked accordingly and are used to connect the cable entries in accordance with electrical principles. The installer can adjust the output voltage in a given range with a potentiometer.

Specification:

Features / filters

Output type of supply [Screw terminals](#)

Output voltage [12V, 13,8V,](#)

Power supply [> 100W](#)

Basic technical parameters

Output voltage
CH1 13.8 V

Output voltage CH2	13.3 V
Output current CH1	10.5 A
Output current CH2	0.5 A
Output voltage range	CH1:12~14.5 V
Mains voltage	88~264 V AC 47~63Hz; 124~370 V DC
Input current	2.5 A/115 V AC 1.5 A/230 V AC
Overload protection	CH1:105 ~ 135% Type of AC protection: cut-off when critical value is exceeded, automatic resumption after return to normal operation. UPS circuit: internal fuse
Overvoltage protection	CH1:15.87~18.63 V
Min. battery voltage	10V±0.8 V
Working temp.	-10°C~60°C
Humidity	20~90% RH
Storage conditions	-20°C~85°C,10~95% Y/Y
Dimensions	199 x 110 x 50 mm (D x S x W)
Weight	0.88 kg

UBIQUITI RJ45 Copper Ethernet to SFP port connector



[Read More](#)

SKU: NET-UF-RJ45-1G

Price: 2,990 Vt

Stock: instock

Categories: [Fiber Equipment](#), [Network Other](#), [Ubiquiti](#)

Product Description

The UF-RJ45-1G allows connecting RJ45 Copper Ethernet connections to existing SFP ports.



EXTRALINK Cable Tie, 5*250mm, Black, 100pcs

[Read More](#)

SKU: NET-EL-CT-5-250-100B

Price: 990 Vt

Stock: instock

Categories: [Network Other](#)

Product Description

The cable ties are made of high quality flexible plastic, are characterized by high thermal and mechanical resistance, resistant to solvents, lubricants, sea water and others. In places exposed to the sun, black-colored ties resistant to UV radiation are used. The band can be pulled by hand or with the help of special tools.

Specification:

Length: 250mm Width: 4,8mm Operation temperature: -40°C do +85°C

Motherboard for DELL Optiplex 7010 9010 SFF WR7PY, SH, 3MTH


[Read More](#)

SKU: MBB-WR7PY

Price: 14,990 Vt

Stock: instock

Categories: [Computer Components](#)

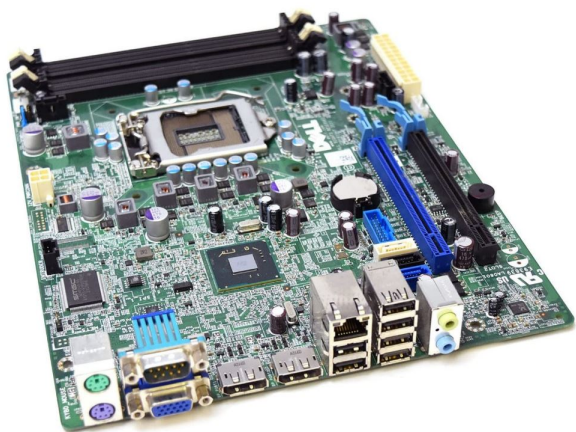

Product Description

IEC C19 16A Connector Rewirable

[Read More](#)

SKU: CBL-C19P

Price: 2,490 Vt

Stock: instock

Categories: [Cables and Cable accessories](#), [UPS / PSU](#)



Product Description

1248880758051.com

IEC C14 90deg Screw terminal connector plug



[Read More](#)

SKU: CBL-C14S-90

Price: 1,290 Vt

Stock: instock

Categories: [Cables and Cable accessories](#), [UPS / PSU](#)

Product Description

Megaraid SAS 9260-8i RAID controller+SFF-8087 to (4) 7-Pin SATA cables



[Read More](#)

SKU: HDD-LSI00202

Price: 17,990 Vt

Stock: instock

Categories: [Hard Drive / SSD](#)

Product Description

Type:SATA / SAS (Serial Attached SCSI) Internal Connectors:2 x SFF-8087 mini-SAS Interface:PCI Express Cache Memory:512MB DDRII cache (800MHz) RAID:RAID 0/1/5/6/10/50/60 Low/high profile bracket



HDD Caddy from DVD cage 12.7mm Aluminum SATA 3.0

[Read More](#)

SKU: HDD-CADDVDBOX

Price: 3,490 Vt

Stock: instock

Categories: [Computer Components](#), [Hard Drive / SSD](#)

Product Description

- Interface :SATA(ODD)-SATAII(HDD)
- HDD support 2.5-inch notebook HDD/SSD SATA
- Material Aluminum+ABS plastic
- Height 12.7mm
- Usage Expand Laptop Storage

IDP RESIN BLK/OVERLAY RIBBN/250 CARDS/ROLL

[Read More](#)

SKU: PRT-659366

Price: 12,290 Vt

Stock: instock

Categories: [Printer Related](#)



Product Description

- Rated for Approximately 250 Cards

- Full-Color Printing with Resin Black
 - Overlay Panel for Added Protection
 - Comes with Cleaning Roller
-

COAST G9 INSPECTION BEAM LED FLASHLIGHT



[Read More](#)

SKU: GDT-21500

Price: 1,590 Vt

Stock: instock

Categories: [Tools](#)

Product Description

- Low-Power Output for Close Work
 - Consistent Beam without Hot Spot
 - Head Twists to Activate
 - Lightweight Polymer Body
 - IPX4-Rated, Weather Resistant
 - Slip-Resistant Raised Pebble Texture
 - Reversible & Removable 2-Way Clip
 - Runs on One Included AAA Battery
 - Clamshell Packaging
-



NITECORE TUBE v2 LED KEY-CHAIN FLASHLIGHT/BLACK

[Read More](#)

SKU: GDT-TUBEV2.0BLACK

Price: 1,990 Vt

Stock: instock

Categories: [Tools](#)

Product Description

- 1 / 55 Lumens
- LED Emitter
- Single Multi-Stage Switch
- Momentary and Constant-On Modes
- Infinitely Variable Brightness
- Impact Resistant to 3.3'
- Built-In Rechargeable Li-Ion Battery
- Micro-USB Charging Port
- Dust and Water Resistant



BELKIN STANDARD MOUSE PAD - BLUE

[Read More](#)

SKU: MOU-F8E081-BLU

Price: 990 Vt

Stock: instock

Categories: [Keyboard and Mouse](#)

Product Description

- Jersey Surface
 - Nonslip Neoprene Backing
-



ADATA SU750 256GB 2.5inch SSD 3D NAND SLC Caching 550R/520W

[Read More](#)

SKU: HDD-ASU750SS-256GB

Price: 7,590 Vt

Stock: instock

Categories: [Hard Drive / SSD](#)

Product Description

- Interface: SATA III 6Gb/s
 - 550MB/s read, 520MB/s write
 - 3D NAND architecture provides great endurance and value combination
 - Compatible with most system which supports SATA connection
 - Backward compatible with SATA II *Performance will be limited to SATA II standard
 - Sold in sealed box
 - 1 Year SPIM Warranty RTB
-

Belkin USB Type-C to DisplayPort, HDMI, VGA, and DVI Adapter



[Read More](#)

SKU: ADA-AVC003BK-BL

Price: 9,990 Vt

Stock: instock

Categories: [USB](#)

Product Description

- DisplayPort, HDMI, VGA, and DVI Ports
- Integrated USB Type-C Host Cable
- Compact, Portable Design
- Plug-and-Play

512GB Cruzer Ultra Fit USB 3.1 Flash Drive



[Read More](#)

SKU: FLA-SDCZ430-512G-A46

Price: 13,890 Vt

Stock: instock

Categories: [Memory / Flash Drive](#)

Product Description

- 512GB Storage Capacity
- Up to 130 MB/s Read Speed
- USB 3.1 Gen 1 Interface

- Compact Design



UGREEN M.2 NVME SSD ENCLOSURE

UGREEN M.2 NVMe SSD Enclosure USB C 3.1 Gen 2 to M-Key M&B-Key NVMe PCIe 10Gbps External Enclosure Thunderbolt 3 Compatible with MacBook Pro & 2230 2242 2260 2280 NVMe PCIe SSD

[Read More](#)

SKU: HDD-60354

Price: 8,590 Vt

Stock: instock

Categories: [Computer Accessories](#), [Hard Drive / SSD](#), [USB](#)

Product Description

- ONLY for NVMe PCIe M.2 SSD: UGREEN M.2 SSD Enclosure is specially designed for M-Key & M+B Key NVMe PCIe based SSD up to 2TB. Offering an easy way to connect M.2 SSD with your USB-C (Thunderbolt 3 Compatible) laptops for file backup, disk upgrade, clone, data recovery and storage expansion. Does not support NGFF SATA based B-Key and M&B-Key M.2 SSD, M.2 PCIe AHCI SSD, mSATA SSD.
- 10Gbps with UASP Accelerated: With the latest USB 3.1 Gen2, PCIe Gen3 and UASP ready, this M.2 enclosure achieves 10Gbps data transmission rate from NVMe PCIe SSD to USB-C laptops, which is faster enough to transfer 10GB files in 10 seconds. The advanced ASM2362 chip greatly ensures a steady and speedy transmission. Your NVMe SSD will perform at its best with super speed transmission at 900-998MB/s reading and writing.
- Tool-Free Installation: UGREEN M.2 NVMe enclosure allows quick and easy installation of your M.2 NVMe SSDs. Plug and play, no driver needed. Just slide the back cover and open the case, plug your M.2 SSD into the M-Key or M&B-key slot, fasten with two rubbers included, finally close the cover. Compact and portable with a sleek aluminum shell for easy carrying while on the go.

- **Broad Compatibility:** Supports Windows, LINUX, Mac OS 8.0 and above systems. Compatible with Samsung 970 EVO Plus/ 970 EVO/970 Pro/960 EVO/950 PRO/PM981/SM961/ PM951, WD Black SN750, Crucial P1 1TB, HP EX900, Intel Optane 800P/760P, Toshiba RC100/XG5/XG6, ADATA XPG SX8000, CORSAIR MP300/MP510, Plextor M9Pe/M8Pe, Kingston A1000,Pioneer APS-SE10G-512, Extreme PRO m.2, Seagate BarraCuda 510, etc. Not Support USB-C Smartphone
 - **User Friendly Design:** Made of premium aluminum alloy for better heat dissipation, no cooling fan is needed for high-speed working. The LED indicator lets you know the working status easily. Features S.M.A.R.T function to check the status of your M.2 SSD on computer. Built with short-circuit, over-current and multi-protection to ensure safety for your SSD and valuable data.
-