

## Ubiquiti Instant 802.3af Indoor 48V



[Read More](#)

**SKU:** NET-UBNT-802AF-IND

**Price:** 5,140 Vt

**Stock:** instock

**Categories:** [Ubiquiti](#), [UPS / PSU](#)

### Product Description

Features:

The Instant 802.3af Gigabit PoE Converter transforms any Ubiquiti® UniFi®, UniFi Video, or airMAX® 24V PoE (Power over Ethernet) device into a fully compliant, 802.3af-compatible product. The Instant 802.3af Gigabit PoE Converter works with 10/100/1000 Mbps ports to deliver high throughput speeds over its wired connection. The Instant 802.3af Gigabit PoE Converter integrates seamlessly with a variety of auto-sensing 802.3af PoE switches for remote power control applications. As you manage and monitor your network, you can conveniently power or power cycle your remote devices using your 802.3af switch. For ease of power management, you can centralize the 802.3af switch and power source, and you can include a UPS (Uninterruptible Power Supply) as a backup. This way your network continues to run even during a temporary power outage. Available in both indoor and outdoor versions, the Instant 802.3af Gigabit PoE Converter is compatible with Ubiquiti UniFi, UniFi Video, or airMAX 24V PoE devices\* using 100 Mbps or Gigabit Ethernet ports. High voltage carries power more efficiently (using less current) than low voltage. The Instant 802.3af Gigabit PoE Converter enables longer cable runs due to a more efficient power delivery – so your products can get the power they require even when they are located far from the 802.3af switch. The Instant 802.3af Gigabit PoE Converter provides an additional  $\pm 15\text{kV}$  of Ethernet isolation for built-in protection that lessens the risk of ESD or surge damage to your devices.

Specification:

Dimensions:  $\varnothing 30.26 \times 95.5$  mm ( $\varnothing 1.19 \times 3.76$ ") Weight: 50 g (1.76 oz) Networking Interface PoE In (802.3af): (1) Gigabit RJ45 Port Networking Interface PoE Out (24V Passive): (1) Gigabit

RJ45 Port Operating Temperature: 0 to 70° C (32 to 158° F) Power Input: 48V, 802.3af Max. Power Output: 24V, 0.5A Power Method: 24V Passive PoE (Pairs 4, 5+; 7, 8 Return) Ethernet ESD/Surge Protection: ±15k

---



## SURETOUCH LITE 2 15in Touch screen FHD

[Read More](#)

**SKU:** SCR-STL1502

**Price:** 44,990 Vt

**Stock:** instock

**Categories:** [Desktop / Server](#), [POS](#)

### Product Description

---

## Chromecast 4 - with Google TV - 4K - Snow

[Read More](#)

**SKU:** VID-GA01919-US

**Price:** 6,490 Vt

**Stock:** instock

**Categories:** [Multimedia](#)



### Product Description

- Wirelessly Stream & Mirror Content
- 4K UHD / 60 Hz Output
- HDR10, HDR10+, Dolby Vision Support
- Dual-Band Wi-Fi 5 Connectivity

- Integrated HDMI Connector
  - Google Assistant Built-In
  - Dolby Atmos Support
  - Android TV OS
  - Voice Remote Control
  - Compact Design
- 

## JBL Tune 115BT Wireless In-Ear Headphones WHITE 3MTH WTY

Enjoy your favorite music or podcasts and make hands-free calls with the **TUNE 115BT Wireless In-Ear Headphones** from **JBL**.

[Read More](#)

**SKU:** SPK-JBLT115BTWHTAM

**Price:** 3,790 Vt

**Stock:** instock

**Categories:** [Headphones / Earpieces](#)



### Product Description

#### Key Features

- 8.6mm Dynamic Drivers
  - Up to 8 Hours of Playback
  - Multipoint Pairing
  - Flat Tangle-Resistant Cable
  - Magnetic Ear Pieces
  - Built-In Mic for Hands-Free Calling
  - 3-Button In-Line Remote
-



## Targus TSB966GL Intellect Essentials 15.6inch Backpack BLACK

[Read More](#)

**SKU:** CAR-TSB966GL


**Price:** 4,690 Vt

**Stock:** instock

**Categories:** [Bags / Cases](#)

### Product Description

- Slim, lightweight design
  - Dedicated, side-loading laptop compartment
  - Air mesh back panel for comfort
- 

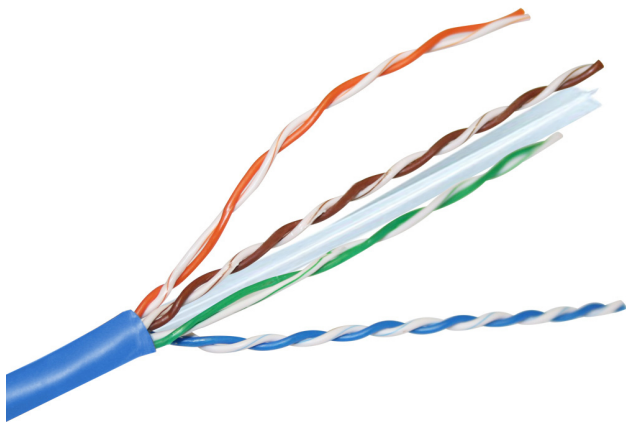

## CABAC CAT6 UTP CABLE, per meter (Full Roll is 305m)

[Read More](#)

**SKU:** CBL-CABAC-C6-UTP

**Price:** 139 Vt

**Stock:** instock

**Categories:** [Cables and Cable accessories](#)

### Product Description

- Component Compliant Category 6
  - Outstanding performance headroom
  - Easy feed box
  - 305m Boxes
  - Price shown is per meter, contact us for price of a full roll.
-



## ENERGIZER CR2450 LITHIUM COIN BATTERY

[Read More](#)

**SKU:** BATT-CR2450

**Price:** 990 Vt

**Stock:** instock

**Categories:** [Batteries](#)

### Product Description

---



## EPSON TM-T82III ETH/USB RECEIPT PRINTER

[Read More](#)

**SKU:** PRT-TM-T82III-ETH

**Price:** 59,990 Vt

**Stock:** instock

**Categories:** [POS](#), [Printers / Scanners](#)

### Product Description

MODEL NAME	TM-T82III
PRINT METHOD	Line Thermal
DOT DENSITY	203 dpi x 203 dpi
PRINT SPEED	Max. 250mm/s
PRINT WIDTH (80mm paper width)	72±0.5mm

PRINT WIDTH (58mm paper width)	52.5±0.5mm
FONTS	12x24 (Font A), 9x17 (Font B)
COLUMN CAPACITY (80MM PAPER WIDTH)	48 (Font A), 64 (Font B)
COLUMN CAPACITY (58MM PAPER WIDTH)	35 (Font A), 46 (Font B)
CHARACTER SIZE (mm)	1.25x3 mm (Font A), 0.88x2.13 mm (Font B)
CHARACTER SET	Alphanumeric 95, International character 18 set, Graphics 128x43 page including user-defined page
CHARACTERS	ANK, Simplified Chinese
BARCODE	UPC-A, UPC-E, JAN8/EAN 8, JAN13/EAN13, Code39, Code93, Code128, ITF, CODABAR(NW-7), GS1-128, GS1 DataBar Omnidirectional, GS1 DataBar Truncated, GS1 DataBar Limited, GS1 DataBar Expanded
2-DIMENSIONAL SYMBOLS	PDF417, QR code, Maxi Code, Datamatrix, Aztec, Two-dimensional GS1 DataBar, Composite Symbology
PAPER SIZE (80mm paper width)	79.5 ± 0.5mm
PAPER SIZE (58mm paper width)	57.5 ± 0.5mm
DIAMETER	83[mm]
PAPER THICKNESS	48-80 μm
AUTO CUTTER	Partial cut (cutting with one point in left edge left uncut)
SENSORS	Roll paper end / Roll paper near-end / Cover open
MCBF	60 million lines
MTBF	360,000 hours
AUTO CUTTER LIFE	1.5 million cuts
HEAD LIFE	150km, 15 million lines
INTERFACES	USB 2.0(capped)+Ethernet;
D.K.D. FUNCTIONS	2 drivers
AC ADAPTER	AC adapter C1
POWER SOURCE	DC 24V±5%
POWER CONSUMPTION	Approx 0.80W (Stand-by) Approx 29.5W (Operating)
TEMPERATURE	Operation 5-45°C / Storage -10-50°C
HUMIDITY	Operation 10-90% / Storage 10-90%
NOISE LEVEL	Approx. 55 dB (bystander position)
OVERALL DIMENSIONS	140mm (W) x 199mm (D) x 146mm (H)

WEIGHT	1.7Kg
COLOUR	EBCK
INSTALLATION	Horizontally / Vertically / Wall-mounted
BUZZER	Unsupported
OPERATING SYSTEMS	Windows, MacOSX, iOS, Android, Linux
DATA BUFFER	Selectable as 45 bytes or 4 KB
WHAT'S IN THE BOX	Roll paper, User's manual, AC adapter, AC cable, USB cable, Wall hanging bracket, Screws for wall hanging bracket, 58mm-width paper guide plate, Power switch cover, Power switch waterproof cover, Rubber feet for vertical installation

---

## Quality Medium Umbrella SPIM Sponsor

[Read More](#)

**SKU:** GDT-UMBRELA-M

**Price:** 2,250 Vt

**Stock:** instock

**Categories:** [Tools](#)



## Product Description

---

## Quality Large Umbrella SPIM sponsor



[Read More](#)

**SKU:** GDT-UMBRELA-L

**Price:** 3,450 Vt

**Stock:** instock

**Categories:** [Tools](#)

### Product Description

---



## TELSTRA CR2000 MKII CORDLESS PHONE

[Read More](#)

**SKU:** PHO-CR2000

**Price:** 4,990 Vt

**Stock:** instock

**Categories:** [Telephone / PABX](#)

### Product Description

Documentation: [cr2000mkii.pdf](#)

---





## **SAMSUNG 27in, 16:9 CURVE LED,1920x1080, 4MS, D-SUB, HDMI, BEZELESS**

[Read More](#)

**SKU:** SCR-LC27R500FHEXXY

**Price:** 29,990 Vt

**Stock:** instock

**Categories:** [LCD / Screens](#)

### **Product Description**

### **Dimensions**

Dimensions With Stand: 614.2 x 466.2 x 251.2mm | Without Stand: 614.2 x 362.8 x 94.4mm

VESA Wall Mount Pattern 75 x 75mm

Weight With Stand: 4.3kg | Without Stand: 3.5kg

### **Display**

Colour Support: 16.7M

Curvature: 1800R

Dynamic Contrast Ratio: Mega

Native Aspect Ratio: 16:9

Refresh Rate: 60Hz

Resolution: 1920 x 1080p Full HD

Response Time L4(GTG)ms

Screen Size: 27"

Static Contrast Ratio: 3000:1

Type 3 Sided Bezel Less Curved Display

Viewing Angle: Horizontal: 178degree / Vertical: 178degree

### **Functions And Features**

Features Game Mode, FreeSync

### **General**

Pan & Tilt Rotation -2.0degree ~ 22.0degree°

## Inputs

HDMI x1

VGA (D-sub )x1

## Inputs/ Outputs

Headphone Jack:Yes

## Power

Power Consumption: 35W (Max), Less than 0.3W (DPMS)

Power Supply: AC 100~240V

---

## APC BACK-UPS (BX) 950VA, 230V,AVR

[Read More](#)

**SKU:** UPS-BX950MI-AZ

**Price:** 18,990 Vt

**Stock:** instock

**Categories:** [UPS / PSU](#)



## Product Description

### Output

**Max Configurable Power (Watts):** 480 Watts / 950VA

**Output Frequency (sync to mains):** 50/60 Hz +/- 1 Hz Sync to mains

**Topology:** Line interactive

**Waveform type:** Stepped approximation to a sinewave

**Transfer Time:** 6 ms typical : 10 ms maximum

### Input

**Input frequency:** 50/60 Hz +/- 5 Hz Auto-sensing

**Input voltage range for main operations:** 140 - 300V

**Number of Power Cords:** 1

**Input Power Factor at Full Load:** 0.54

## Batteries & Runtime

**Battery type:** Lead-acid battery

**Typical recharge time:** 8 hour(s)

**Replacement Battery:** [RBC17](#)

**Expected Battery Life (years):** 3 - 5

**Battery Volt-Amp-Hour Capacity:** 108

**Runtime:** [View Runtime Chart](#)

## Communications & Management

**Control panel:** LED Status display with on line : on battery

**Audible Alarm:** Alarm when on battery : distinctive low battery alarm

## Surge Protection and Filtering

**Surge energy rating:** 273 Joules

**Data Line Protection:** RJ45 10/100/1000 Base-T Ethernet protection

## Physical

**Maximum Height:** 160MM, 16.0CM

**Maximum Width:** 120MM, 12.0CM

**Maximum Depth:** 355MM, 35.5CM

**Net Weight:** 6.1KG

**Shipping weight:** 6.6KG

**Shipping Height:** 250MM, 25.0CM

**Shipping Width:** 197MM, 19.7CM

**Shipping Depth:** 430MM, 43.0CM

**Color:** Black

**SCC Codes:** 10731304410758

---

# ASUS Wireless USB Adapter 1167MBps



[Read More](#)

**SKU:** NET-USB-AC53NANO

**Price:** 5,490 Vt

**Stock:** instock

**Categories:** [Computer Accessories](#), [Network Wireless / Bluetooth](#)

## Product Description

### Key Features

- **World's smallest USB MU-MIMO Wi-Fi adapter**

Super-fast Wi-Fi in a nano-sized package that's small enough to leave plugged in!

- **Instant Wi-Fi upgrade for laptops**

Enjoy 802.11ac Wi-Fi speeds.

- **Perfect for streaming and gaming**

Dual-band support gives you the 5GHz frequency band for smooth 4K UHD streaming and low latency gaming. **Extreme 5th-generation Wi-Fi speed** Super-fast Wi-Fi ever becomes more accessible via USB, going up to 867Mbps on the clear 5GHz band. Using 802.11ac wireless, faster connectivity and enjoyment come to all your devices. **Multi-user MIMO support** MU-MIMO technology boosts connection speed when multiple compatible clients are online. **Travel-friendly design** The USB-AC53 Nano is specially-designed to be compact and durable to safely and securely stay plugged into a notebook PC even inside a slim carrying case. **Selectable dual-band 300Mbps/ 867Mbps bandwidth** Dual-band operation suits mainstream and power users. The 2.4 GHz band is perfect for web browsing, email, and social networking, while the 5 GHz frequency enables smooth 4K streaming and online gaming for blazingly fast and lag-free home entertainment.

Specification:

<b>Network Standard</b>	IEEE 802.11 ac
<b>Product Segment</b>	AC1200 enhanced AC performance : 300+867 Mbps
<b>Interface</b>	USB 2.0
<b>Data Rate</b>	802.11a : 6,9,12,18,24,36,48,54 Mbps 802.11b : 1, 2, 5.5, 11 Mbps 802.11g : 6,9,12,18,24,36,48,54 Mbps 802.11n : up to 300 Mbps 802.11ac : up to 867 Mbps
<b>Antenna</b>	2 x PIFA Internal 1.81 dBi antenna x 2
<b>Transmit/Receive</b>	MIMO technology
<b>Operating Frequency</b>	2.4 GHz / 5 GHz
<b>Security</b>	64-bit WEP, 128-bit WEP, WPA2-PSK, WPA-PSK
<b>Certificates</b>	CE, FCC, IC, NCC
<b>Dimensions</b>	20 x 14 x 7 ~ mm (WxDxH) (Without Bezel)
<b>Weight</b>	5 g (Device Only)
<b>OS Support</b>	Windows® 10 Windows® 8.1 Windows® 8 Windows® 7 Mac OS X 10.7 to 10.12
<b>Package Content</b>	Support CD Warranty card
<b>Note</b>	*The network speeds and bandwidth based on current IEEE 802.11ac specifications. Actual performance may be affected by network and service provider factors, interface type, and other conditions. Connected devices must be 802.11ac-compatible for best results. Out Put power as below: 2412-2472MHz (802.11n HT40 MCS0): 17.24 dBm 5180-5240MHz (802.11n HT20 MCS0): 17.38 dBm 5260-5320MHz (802.11ac VHT80 MCS0): 15.8 dBm 5500-5700MHz (802.11n HT20 MCS0): 13.31 dBm



## EXTRALINK OUTDOOR FTTX CLOSURE 4 TRAYS 96 CORE BRUCE

[Read More](#)

**SKU:** NET-EL-FTTX-BRUCE-96

**Price:** 5,990 Vt

**Stock:** instock

**Categories:** [Cables and Cable accessories](#), [Fiber Equipment](#)

### Product Description

The closures are made of tough anti-corrosive polycarbonate that makes the closures ideal for aerial, cable duct, direct burial and well applications. The BRUCE closure can accommodate up to 4x 24-fiber splice trays. The closures employ gasket-sealing technology that enables easy of installation and re-entry requiring no special tools.

- Reliable gasket sealing
- Easy installation with no special tool required
- Re-enterable with no re-entry kit needed
- High compressive strength

Applications:

- Suitable for Ribbon and non-ribbon fibers
- Aerial
- Cable duct
- Direct burial
- Well

Specification:

No. of Cable Port: 2 Max. Cable Diameter allowed: 14mm/12mm Dimensions: 270x200x85mm  
Weight : 1.2~1.5kg Operating temperature: -40~+60°C Fiber Bend Radius: 30mm Max. No. of  
Splice Trays: 4 Max. Capacity (single fiber splice): 96

---



## EXTRALINK Power Supply with Battery Charger 12V/13.8V 155W

[Read More](#)

**SKU:** PWR-EL-AD-155A

**Price:** 7,990 Vt

**Stock:** instock

**Categories:** [UPS / PSU](#)

### Product Description

#### Extralink buffer power supply - ensures continuous operation

**The buffer power supply unit** is an electrical device that converts 230 V mains voltage to DC voltage. Its specificity lies in the fact that we can connect an external battery to it, from which energy will be drawn in case of a 230 V power outage, so as to ensure the continuity of the receiving device.

#### More efficient cooling of the device

The perforated metal casing facilitates airflow, which results in more efficient cooling of the unit. The screw terminals are marked accordingly and are used to connect the cable entries in accordance with electrical principles. The installer can adjust the output voltage in a given range with a potentiometer.

Specification:

Features / filters

Output type of supply [Screw terminals](#)

Output voltage [12V, 13,8V,](#)

Power supply [> 100W](#)

Basic technical parameters

Output voltage  
CH1 13.8 V

Output voltage CH2	13.3 V
Output current CH1	10.5 A
Output current CH2	0.5 A
Output voltage range	CH1:12~14.5 V
Mains voltage	88~264 V AC 47~63Hz; 124~370 V DC
Input current	2.5 A/115 V AC 1.5 A/230 V AC
Overload protection	CH1:105 ~ 135% Type of AC protection: cut-off when critical value is exceeded, automatic resumption after return to normal operation. UPS circuit: internal fuse
Overvoltage protection	CH1:15.87~18.63 V
Min. battery voltage	10V±0.8 V
Working temp.	-10°C~60°C
Humidity	20~90% RH
Storage conditions	-20°C~85°C,10~95% Y/Y
Dimensions	199 x 110 x 50 mm (D x S x W)
Weight	0.88 kg

---



## UBIQUITI RJ45 Copper Ethernet to SFP port connector



[Read More](#)

**SKU:** NET-UF-RJ45-1G

**Price:** 2,990 Vt

**Stock:** instock

**Categories:** [Fiber Equipment](#), [Network Other](#), [Ubiquiti](#)

### Product Description

The UF-RJ45-1G allows connecting RJ45 Copper Ethernet connections to existing SFP ports.



## EXTRALINK Cable Tie, 5\*250mm, Black, 100pcs

[Read More](#)

**SKU:** NET-EL-CT-5-250-100B

**Price:** 990 Vt

**Stock:** instock

**Categories:** [Network Other](#)

### Product Description

The cable ties are made of high quality flexible plastic, are characterized by high thermal and mechanical resistance, resistant to solvents, lubricants, sea water and others. In places exposed to the sun, black-colored ties resistant to UV radiation are used. The band can be pulled by hand or with the help of special tools.

Specification:

Length: 250mm Width: 4,8mm Operation temperature: -40°C do +85°C

## Motherboard for DELL Optiplex 7010 9010 SFF WR7PY, SH, 3MTH


[Read More](#)

**SKU:** MBB-WR7PY

**Price:** 14,990 Vt

**Stock:** instock

**Categories:** [Computer Components](#)

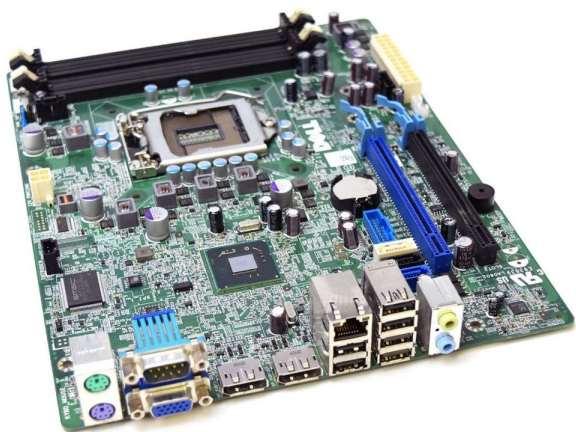

### Product Description

---

## IEC C19 16A Connector Rewirable

[Read More](#)

**SKU:** CBL-C19P

**Price:** 2,490 Vt

**Stock:** instock

**Categories:** [Cables and Cable accessories](#), [UPS / PSU](#)



### Product Description

---

1248880758051.com

## IEC C14 90deg Screw terminal connector plug



[Read More](#)

**SKU:** CBL-C14S-90

**Price:** 1,290 Vt

**Stock:** instock

**Categories:** [Cables and Cable accessories](#), [UPS / PSU](#)

### Product Description

---

## Megaraid SAS 9260-8i RAID controller+SFF-8087 to (4) 7-Pin SATA cables



[Read More](#)

**SKU:** HDD-LSI00202

**Price:** 17,990 Vt

**Stock:** instock

**Categories:** [Hard Drive / SSD](#)

### Product Description

Type:SATA / SAS (Serial Attached SCSI) Internal Connectors:2 x SFF-8087 mini-SAS Interface:PCI Express Cache Memory:512MB DDRII cache (800MHz) RAID:RAID 0/1/5/6/10/50/60 Low/high profile bracket

---



## HDD Caddy from DVD cage 12.7mm Aluminum SATA 3.0

[Read More](#)

**SKU:** HDD-CADDVDBOX

**Price:** 3,490 Vt

**Stock:** instock

**Categories:** [Computer Components](#), [Hard Drive / SSD](#)

### Product Description

- Interface :SATA(ODD)-SATAII(HDD)
- HDD support 2.5-inch notebook HDD/SSD SATA
- Material Aluminum+ABS plastic
- Height 12.7mm
- Usage Expand Laptop Storage

## IDP RESIN BLK/OVERLAY RIBBN/250 CARDS/ROLL

[Read More](#)

**SKU:** PRT-659366

**Price:** 12,290 Vt

**Stock:** instock

**Categories:** [Printer Related](#)



### Product Description

- Rated for Approximately 250 Cards

- Full-Color Printing with Resin Black
  - Overlay Panel for Added Protection
  - Comes with Cleaning Roller
- 

## COAST G9 INSPECTION BEAM LED FLASHLIGHT



[Read More](#)

**SKU:** GDT-21500

**Price:** 1,590 Vt

**Stock:** instock

**Categories:** [Tools](#)

### Product Description

- Low-Power Output for Close Work
  - Consistent Beam without Hot Spot
  - Head Twists to Activate
  - Lightweight Polymer Body
  - IPX4-Rated, Weather Resistant
  - Slip-Resistant Raised Pebble Texture
  - Reversible & Removable 2-Way Clip
  - Runs on One Included AAA Battery
  - Clamshell Packaging
-